

## LED LINEAR

### 4' T5 DIRECT (PLUG & PLAY)



- Energy saving led alternatives to traditional fluorescent T5 lamps
- Available in 3000K, 4000K & 5000K
- Replaces a 54W High Output Fluorescent
- DLC Qualified
- Not dimmable
- Recommended use with electronic ballasts
- Lasts twice as long as a fluorescent

Visit [www.bulbrite.com](http://www.bulbrite.com) for additional information




Intertek

## LED LINEAR

### 4' T5 Direct (PLUG & PLAY)

- Energy saving led alternatives to traditional fluorescent T5 lamps
- Available in 3000K, 4000K & 5000K
- Replaces a 54W High Output Fluorescent
- DLC Qualified
- Not dimmable
- Recommended use with electronic ballasts
- Lasts twice as long as a fluorescent




Commercial

LED	FLUORESCENT
27W	= 54W



Intertek

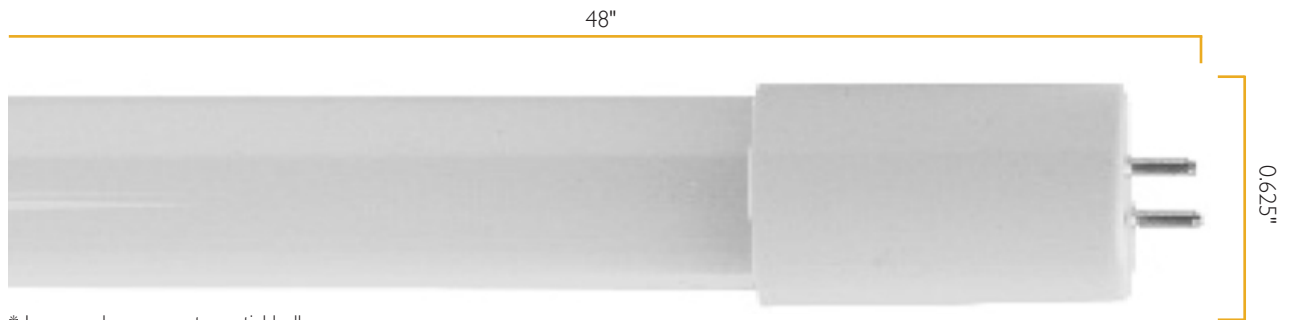

\* Image only represents partial bulb.

#### T5 DIRECT

- LED27T5/48/830/DIR
- LED27T5/48/840/DIR
- LED27T5/48/850/DIR

Watts	Bulb Type	Base	Item #	Ordering Code	Volts	Inner/Master	Description	Color Temp.	CRI	Lumens	Average Rated Life	M.O.L.	M.O.D.
27	T5	BI-PIN	776100	<a href="#">LED27T5/48/830/DIR</a>	120-277	5 / 20	Soft White	3000K	83	3200	50,000	48"	0.625"
27	T5	BI-PIN	776101	<a href="#">LED27T5/48/840/DIR</a>	120-277	5 / 20	Cool White	4000K	83	3300	50,000	48"	0.625"
27	T5	BI-PIN	776102	<a href="#">LED27T5/48/850/DIR</a>	120-277	5 / 20	Soft Daylight	5000K	83	3400	50,000	48"	0.625"

**NOTE:**

- 776100, 776101 and 776102 are UL listed. (UL Type A)
- They are also ETL-NSF certified for installation in food procession areas and other environments with similar requirements.